

Siemens  
EcoTech



SIMATIC S7-1200, CPU 1214C, compact CPU, DC/DC/relay, onboard I/O: 14 DI 24 V DC; 10 DO relay 2 A; 2 AI 0-10 V DC, power supply: DC 20.4-28.8 V DC, program/data memory 150 KB



Figure similar

General information	
Product type designation	CPU 1214C DC/DC/relay
Firmware version	V4.6
Engineering with	
• Programming package	STEP 7 V18 or higher
Supply voltage	
Rated value (DC)	
• 24 V DC	Yes
permissible range, lower limit (DC)	20.4 V
permissible range, upper limit (DC)	28.8 V
Reverse polarity protection	Yes
Load voltage L+	
• Rated value (DC)	24 V
• permissible range, lower limit (DC)	20.4 V
• permissible range, upper limit (DC)	28.8 V
Input current	
Current consumption (rated value)	500 mA; CPU only
Current consumption, max.	1 500 mA; CPU with all expansion modules
Inrush current, max.	12 A; at 28.8 V
I <sup>2</sup> t	0.8 A <sup>2</sup> ·s
Output current	
for backplane bus (5 V DC), max.	1 600 mA; Max. 5 V DC for SM and CM
Encoder supply	
24 V encoder supply	
• 24 V	L+ minus 4 V DC min.
Power loss	
Power loss, typ.	12 W
Memory	
Work memory	
• integrated	150 kbyte
Load memory	
• integrated	4 Mbyte
• Plug-in (SIMATIC Memory Card), max.	with SIMATIC memory card
Backup	
• present	Yes
• maintenance-free	Yes

• without battery	Yes
<b>CPU processing times</b>	
for bit operations, typ.	0.08 µs; / instruction
for word operations, typ.	1.7 µs; / instruction
for floating point arithmetic, typ.	2.3 µs; / instruction
<b>CPU-blocks</b>	
Number of blocks (total)	DBs, FCs, FBs, counters and timers. The maximum number of addressable blocks ranges from 1 to 65535. There is no restriction, the entire working memory can be used
<b>OB</b>	
• Number, max.	Limited only by RAM for code
<b>Data areas and their retentivity</b>	
Retentive data area (incl. timers, counters, flags), max.	14 kbyte
<b>Flag</b>	
• Size, max.	8 kbyte; Size of bit memory address area
<b>Local data</b>	
• per priority class, max.	16 kbyte; Priority class 1 (program cycle): 16 KB, priority class 2 to 26: 6 KB
<b>Address area</b>	
<b>Process image</b>	
• Inputs, adjustable	1 kbyte
• Outputs, adjustable	1 kbyte
<b>Hardware configuration</b>	
Number of modules per system, max.	3 comm. modules, 1 signal board, 8 signal modules
<b>Time of day</b>	
<b>Clock</b>	
• Hardware clock (real-time)	Yes
• Backup time	480 h; Typical
• Deviation per day, max.	±60 s/month at 25 °C
<b>Digital inputs</b>	
Number of digital inputs	14; Integrated
• of which inputs usable for technological functions	6; HSC (High Speed Counting)
Source/sink input	Yes
<b>Number of simultaneously controllable inputs</b>	
all mounting positions	
— up to 40 °C, max.	14
<b>Input voltage</b>	
• Rated value (DC)	24 V
• for signal "0"	5 V DC at 1 mA
• for signal "1"	15 V DC at 2.5 mA
<b>Input delay (for rated value of input voltage)</b>	
for standard inputs	
— parameterizable	0.2 ms, 0.4 ms, 0.8 ms, 1.6 ms, 3.2 ms, 6.4 ms and 12.8 ms, selectable in groups of four
— at "0" to "1", min.	0.2 ms
— at "0" to "1", max.	12.8 ms
for interrupt inputs	
— parameterizable	Yes
for technological functions	
— parameterizable	Single phase: 3 @ 100 kHz & 3 @ 30 kHz, differential: 3 @ 80 kHz & 3 @ 30 kHz
<b>Cable length</b>	
• shielded, max.	500 m; 50 m for technological functions
• unshielded, max.	300 m; for technological functions: No
<b>Digital outputs</b>	
Number of digital outputs	10; Relays
<b>Switching capacity of the outputs</b>	
• with resistive load, max.	2 A
• on lamp load, max.	30 W with DC, 200 W with AC
<b>Output delay with resistive load</b>	
• "0" to "1", max.	10 ms; max.
• "1" to "0", max.	10 ms; max.

<b>Relay outputs</b>	
<ul style="list-style-type: none"> <li>Number of relay outputs</li> <li>Number of operating cycles, max.</li> </ul>	10 mechanically 10 million, at rated load voltage 100 000
<b>Cable length</b>	
<ul style="list-style-type: none"> <li>shielded, max.</li> <li>unshielded, max.</li> </ul>	500 m 150 m
<b>Analog inputs</b>	
Number of analog inputs	2
<b>Input ranges</b>	
<ul style="list-style-type: none"> <li>Voltage</li> </ul>	Yes
<b>Input ranges (rated values), voltages</b>	
<ul style="list-style-type: none"> <li>0 to +10 V</li> <li>— Input resistance (0 to 10 V)</li> </ul>	Yes ≥100k ohms
<b>Cable length</b>	
<ul style="list-style-type: none"> <li>shielded, max.</li> </ul>	100 m; twisted and shielded
<b>Analog outputs</b>	
Number of analog outputs	0
<b>Analog value generation for the inputs</b>	
<b>Integration and conversion time/resolution per channel</b>	
<ul style="list-style-type: none"> <li>Resolution with overrange (bit including sign), max.</li> <li>Integration time, parameterizable</li> <li>Conversion time (per channel)</li> </ul>	10 bit Yes 625 μs
<b>Encoder</b>	
<b>Connectable encoders</b>	
<ul style="list-style-type: none"> <li>2-wire sensor</li> </ul>	Yes
<b>1. Interface</b>	
Interface type	PROFINET
Isolated	Yes
automatic detection of transmission rate	Yes
Autonegotiation	Yes
Autocrossing	Yes
<b>Interface types</b>	
<ul style="list-style-type: none"> <li>RJ 45 (Ethernet)</li> <li>Number of ports</li> <li>integrated switch</li> </ul>	Yes 1 No
<b>Protocols</b>	
<ul style="list-style-type: none"> <li>PROFINET IO Controller</li> <li>PROFINET IO Device</li> <li>SIMATIC communication</li> <li>Open IE communication</li> <li>Web server</li> <li>Media redundancy</li> </ul>	Yes Yes Yes Yes; Optionally also encrypted Yes No
<b>PROFINET IO Controller</b>	
<ul style="list-style-type: none"> <li>Transmission rate, max.</li> </ul>	100 Mbit/s
<b>Services</b>	
<ul style="list-style-type: none"> <li>PG/OP communication</li> <li>Isochronous mode</li> <li>IRT</li> <li>PROFenergy</li> <li>Prioritized startup</li> <li>Number of IO devices with prioritized startup, max.</li> <li>Number of connectable IO Devices, max.</li> <li>Number of connectable IO Devices for RT, max.</li> <li>of which in line, max.</li> <li>Activation/deactivation of IO Devices</li> <li>Number of IO Devices that can be simultaneously activated/deactivated, max.</li> <li>Updating time</li> </ul>	Yes; encryption with TLS V1.3 pre-selected No No No Yes 16 16 16 16 Yes 8 The minimum value of the update time also depends on the communication component set for PROFINET IO, on the number of IO devices and the quantity of configured user data.
<b>PROFINET IO Device</b>	

<b>Services</b>	
— PG/OP communication	Yes; encryption with TLS V1.3 pre-selected
— Isochronous mode	No
— IRT	No
— PROFINergy	Yes
— Shared device	Yes
— Number of IO Controllers with shared device, max.	2
<b>Protocols</b>	
Supports protocol for PROFINET IO	Yes
PROFIsafe	No
PROFIBUS	Yes; CM 1243-5 (master) or CM 1242-5 (slave) required
OPC UA	Yes; OPC UA Server
AS-Interface	Yes; CM 1243-2 required
<b>Protocols (Ethernet)</b>	
• TCP/IP	Yes
• DHCP	No
• SNMP	Yes
• DCP	Yes
• LLDP	Yes
<b>Redundancy mode</b>	
<b>Media redundancy</b>	
— MRP	No
— MRPD	No
<b>SIMATIC communication</b>	
• S7 routing	Yes
<b>Open IE communication</b>	
• TCP/IP	Yes
— Data length, max.	8 kbyte
• ISO-on-TCP (RFC1006)	Yes
— Data length, max.	8 kbyte
• UDP	Yes
— Data length, max.	1 472 byte
<b>Web server</b>	
• supported	Yes
• User-defined websites	Yes
<b>OPC UA</b>	
• Runtime license required	Yes; "Basic" license required
• OPC UA Server	Yes; data access (read, write, subscribe), method call, runtime license required
— Application authentication	Available security policies: None, Basic128Rsa15, Basic256Rsa15, Basic256Sha256
— User authentication	"anonymous" or by user name & password
— Number of sessions, max.	10
— Number of subscriptions per session, max.	5
— Sampling interval, min.	100 ms
— Publishing interval, min.	200 ms
— Number of server methods, max.	20
— Number of monitored items, recommended max.	1 000
— Number of server interfaces, max.	2
— Number of nodes for user-defined server interfaces, max.	2 000
<b>Further protocols</b>	
• MODBUS	Yes
<b>communication functions / header</b>	
<b>S7 communication</b>	
• supported	Yes
• as server	Yes
• as client	Yes
• User data per job, max.	See online help (S7 communication, user data size)
<b>Number of connections</b>	
• overall	PG Connections: 4 reserved / 4 max; HMI Connections: 12 reserved / 18 max; S7 Connections: 8 reserved / 14 max; Open User Connections: 8 reserved / 14 max; Web Connections: 2 reserved / 30 max; OPC UA Connections: 0 reserved

**Test commissioning functions**

Status/control	
• Status/control variable	Yes
• Variables	Inputs/outputs, memory bits, DBs, distributed I/Os, timers, counters
Forcing	
• Forcing	Yes
Diagnostic buffer	
• present	Yes
Traces	
• Number of configurable Traces	2
• Memory size per trace, max.	512 kbyte

**Interrupts/diagnostics/status information**

Diagnostics indication LED	
• RUN/STOP LED	Yes
• ERROR LED	Yes
• MAINT LED	Yes

**Integrated Functions**

Counter	
• Number of counters	6
• Counting frequency, max.	100 kHz
Frequency measurement	Yes
controlled positioning	Yes
Number of position-controlled positioning axes, max.	8
Number of positioning axes via pulse-direction interface	Up to 4 with SB 1222
PID controller	Yes
Number of alarm inputs	4

**Potential separation**

Potential separation digital inputs	
• Potential separation digital inputs	500 V AC for 1 minute
• between the channels, in groups of	1
Potential separation digital outputs	
• Potential separation digital outputs	Relays
• between the channels	No
• between the channels, in groups of	2

**EMC**

Interference immunity against discharge of static electricity	
• Interference immunity against discharge of static electricity acc. to IEC 61000-4-2	Yes
— Test voltage at air discharge	8 kV
— Test voltage at contact discharge	6 kV
Interference immunity to cable-borne interference	
• Interference immunity on supply lines acc. to IEC 61000-4-4	Yes
• Interference immunity on signal cables acc. to IEC 61000-4-4	Yes
Interference immunity against voltage surge	
• Interference immunity on supply lines acc. to IEC 61000-4-5	Yes
Interference immunity against conducted variable disturbance induced by high-frequency fields	
• Interference immunity against high-frequency radiation acc. to IEC 61000-4-6	Yes
Emission of radio interference acc. to EN 55 011	
• Limit class A, for use in industrial areas	Yes; Group 1
• Limit class B, for use in residential areas	Yes; When appropriate measures are used to ensure compliance with the limits for Class B according to EN 55011

**Degree and class of protection**

IP degree of protection	IP20
-------------------------	------

**Standards, approvals, certificates**


CE mark	Yes
UL approval	Yes
cULus	Yes

FM approval	Yes
RCM (formerly C-TICK)	Yes
KC approval	Yes
Marine approval	Yes
<b>Ecological footprint</b>	
• environmental product declaration	Yes
<b>Global warming potential</b>	
— global warming potential, (total) [CO2 eq]	111 kg
— global warming potential, (during production) [CO2 eq]	20.1 kg
— global warming potential, (during operation) [CO2 eq]	91.5 kg
— global warming potential, (after end of life cycle) [CO2 eq]	-0.896 kg
<b>Ambient conditions</b>	
<b>Free fall</b>	
• Fall height, max.	0.3 m; five times, in product package
<b>Ambient temperature during operation</b>	
• min.	-20 °C
• max.	60 °C; Number of simultaneously activated inputs or outputs 7 or 5 (no adjacent points) at 60 °C horizontal or 50 °C vertical, 14 or 10 at 55 °C horizontal or 45 °C vertical
• horizontal installation, min.	-20 °C
• horizontal installation, max.	60 °C
• vertical installation, min.	-20 °C
• vertical installation, max.	50 °C
<b>Ambient temperature during storage/transportation</b>	
• min.	-40 °C
• max.	70 °C
<b>Air pressure acc. to IEC 60068-2-13</b>	
• Operation, min.	795 hPa
• Operation, max.	1 080 hPa
• Storage/transport, min.	660 hPa
• Storage/transport, max.	1 080 hPa
<b>Altitude during operation relating to sea level</b>	
• Installation altitude, min.	-1 000 m
• Installation altitude, max.	5 000 m; Restrictions for installation altitudes > 2 000 m, see manual
<b>Relative humidity</b>	
• Operation, max.	95 %; no condensation
<b>Vibrations</b>	
• Vibration resistance during operation acc. to IEC 60068-2-6	2 g (m/s <sup>2</sup> ) wall mounting, 1 g (m/s <sup>2</sup> ) DIN rail
• Operation, tested according to IEC 60068-2-6	Yes
<b>Shock testing</b>	
• tested according to IEC 60068-2-27	Yes; IEC 68, Part 2-27 half-sine: strength of the shock 15 g (peak value), duration 11 ms
<b>Pollutant concentrations</b>	
• SO2 at RH < 60% without condensation	SO2: < 0.5 ppm; H2S: < 0.1 ppm; RH < 60% condensation-free
<b>configuration / header</b>	
<b>configuration / programming / header</b>	
<b>Programming language</b>	
— LAD	Yes
— FBD	Yes
— SCL	Yes
<b>Know-how protection</b>	
• User program protection/password protection	Yes
• Copy protection	Yes
• Block protection	Yes
<b>Access protection</b>	
• protection of confidential configuration data	Yes
• Protection level: Write protection	Yes
• Protection level: Read/write protection	Yes
• Protection level: Complete protection	Yes

programming / cycle time monitoring / header	
• adjustable	Yes
<b>Dimensions</b>	
Width	110 mm
Height	100 mm
Depth	75 mm
<b>Weights</b>	
Weight, approx.	435 g

last modified:

10/9/2024 

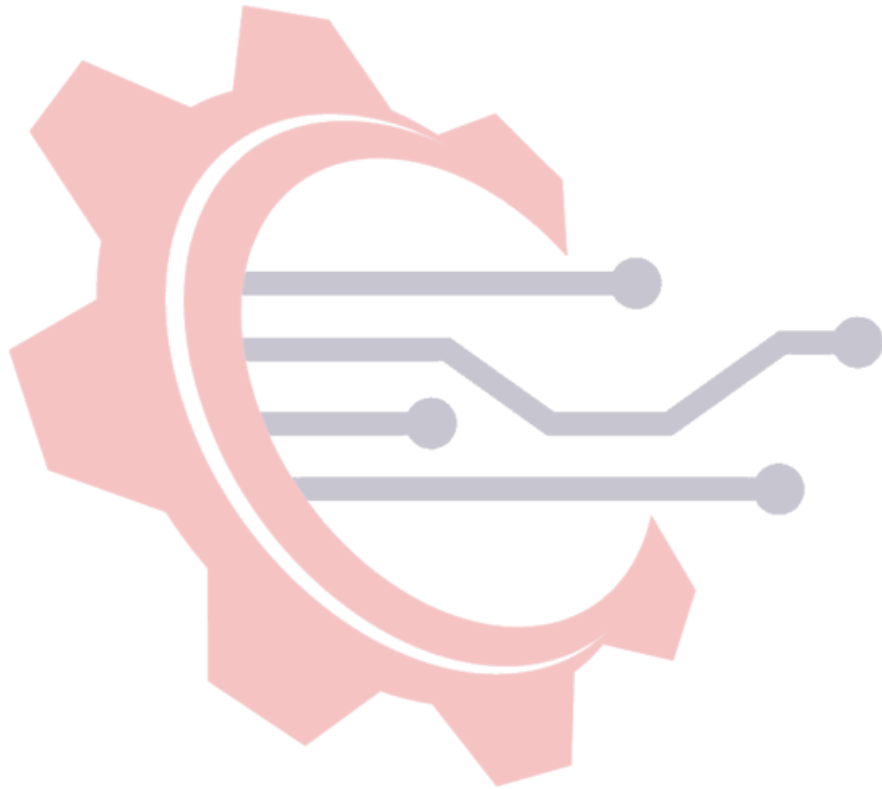

# ماکان کنترول