



Figure similar

Article No. : 6SL3210-5BE22-2CV1

Client order no. :  
Order no. :  
Offer no. :  
Remarks :

Item no. :  
Consignment no. :  
Project :

### Rated data

Input	
Number of phases	3 AC
Line voltage	380 ... 480 V -15 % +10 %
Line frequency	47 ... 63 Hz

Output	
Number of phases	3 AC
<b>Rated voltage</b>	<b>400V IEC      480V NEC 1)</b>
Rated power (LO)	2.20 kW      3.00 hp
Rated power (HO)	2.20 kW      3.00 hp
Rated current (LO)	5.60 A      4.80 A
Rated current (HO)	5.60 A      4.80 A
Rated current (IN)	5.60 A
Pulse frequency	4.00 kHz
Output frequency	0 ... 550 Hz

Overload capability	
Low Overload (LO)	110 % rated output current for 60 s, cycle time 300 s
High Overload (HO)	150 % rated output current for 60 s, cycle time 300 s

### General tech. specifications

Power factor $\lambda$	0.72
Offset factor $\cos \phi$	0.95
Efficiency $\eta$	0.98
Filter class (integrated)	Class A
With integrated braking chopper	Yes

### Communication

Communication	USS, Modbus RTU
---------------	-----------------

### Inputs / outputs

Standard digital inputs	
Number	4

Digital outputs	
Number as relay changeover contact	1
Number as transistor	1

Analog inputs	
Number	2 (Can be used as additional digital input)

Analog outputs	
Number	1

### Ambient conditions

Cooling	External fan
Installation altitude	1,000 m (3,280.84 ft)

Ambient temperature	
Operation <sup>2)</sup>	-10 ... 60 °C (14 ... 140 °F)
Storage	-40 ... 70 °C (-40 ... 158 °F)

Relative humidity	
Max. operation	95 %

### Connections

Max. motor cable length	
Shielded	10 m (32.81 ft)
Unshielded	50 m (164.04 ft)

### Mechanical data

Mounting position	Wall mounting / side-by-side mounting
Degree of protection	IP20 / UL open type
Frame size	FSA
Net weight	1.10 kg (2.43 lb)
Dimensions	
Width	90.0 mm (3.54 in)
Height	166.0 mm (6.54 in)
Depth	145.5 mm (5.73 in)

### Standards


Compliance with standards	CE, cULus, C-Tick (RCM), KC
CE marking	EN 61800-5-1 / EN 60204-1 and EN 61800-3

## Data sheet for SINAMICS V20

Article No. : 6SL3210-5BE22-2CV1

### Converter losses to IEC61800-9-2\*

Efficiency class	IE2
Comparison with the reference converter (90% / 100%)	31.0 %

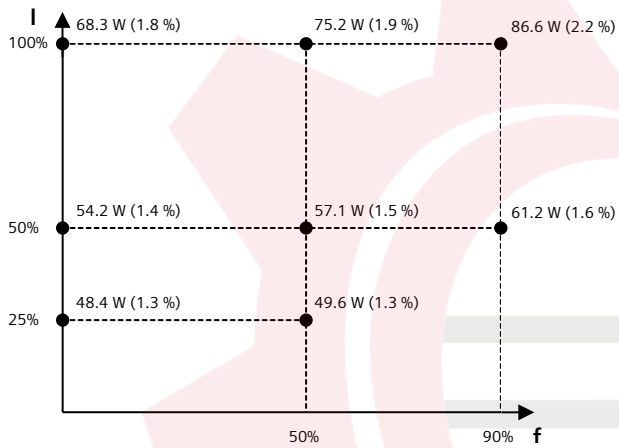

The percentage values show the losses in relation to the rated apparent power of the converter.

The diagram shows the losses for the points (as per standard IEC61800-9-2) of the relative torque generating current (I) over the relative motor stator frequency (f). The values are valid for the basic version of the converter without options/components.

\*calculated values

<sup>1)</sup>The output current and HP ratings are valid for the voltage range 440V-480V

<sup>2)</sup>Please observe derating at temperatures of 40 °C or above