



SIMATIC S7-300, Control Unit FM 355 S, 4 channels, Step and pulse, 4 AI+8 DI+8 DO incl. multi-language configuration package, Manual and Getting Started (de, de, fr, en fr, it) on CD-ROM

Figure similar

Supply voltage	
Load voltage L+	
<ul style="list-style-type: none"> Rated value (DC) 	24 V
<ul style="list-style-type: none"> permissible range, lower limit (DC) 	20.4 V
<ul style="list-style-type: none"> permissible range, upper limit (DC) 	28.8 V
Input current	
from load voltage L+ (without load), max.	270 mA; typ. 220 mA
from backplane bus 5 V DC, max.	75 mA; typ. 50 mA
Power loss	
Power loss, typ.	5.5 W
Power loss, max.	6.9 W
Digital inputs	
Number of digital inputs	8
Input characteristic curve in accordance with IEC 61131, type 2	Yes
Input voltage	
<ul style="list-style-type: none"> Rated value (DC) 	24 V
<ul style="list-style-type: none"> for signal "0" 	-3 to +5V
<ul style="list-style-type: none"> for signal "1" 	13 to 30V
Input current	
<ul style="list-style-type: none"> for signal "1", typ. 	7 mA
Cable length	
<ul style="list-style-type: none"> shielded, max. 	1 000 m
<ul style="list-style-type: none"> unshielded, max. 	600 m
Digital outputs	
Number of digital outputs	8
Short-circuit protection	Yes; Electronic
Limitation of inductive shutdown voltage to	L+ (-1.5 V)
Controlling a digital input	Yes
Switching capacity of the outputs	
<ul style="list-style-type: none"> on lamp load, max. 	5 W
Load resistance range	
<ul style="list-style-type: none"> lower limit 	240 Ω
<ul style="list-style-type: none"> upper limit 	4 kΩ
Output voltage	
<ul style="list-style-type: none"> for signal "1", min. 	L+ (-2.5 V)
Output current	
<ul style="list-style-type: none"> for signal "1" rated value 	100 mA
<ul style="list-style-type: none"> for signal "1" permissible range for 0 to 60 °C, min. 	5 mA
<ul style="list-style-type: none"> for signal "1" permissible range for 0 to 60 °C, max. 	150 mA

<ul style="list-style-type: none"> • for signal "0" residual current, max. 	0.5 mA
Parallel switching of two outputs	
<ul style="list-style-type: none"> • for logic links 	Yes
Switching frequency	
<ul style="list-style-type: none"> • with resistive load, max. 	100 Hz
<ul style="list-style-type: none"> • with inductive load, max. 	0.5 Hz
<ul style="list-style-type: none"> • on lamp load, max. 	100 Hz
Total current of the outputs (per group)	
all mounting positions	
— up to 60 °C, max.	400 mA
Cable length	
<ul style="list-style-type: none"> • shielded, max. 	1 000 m
<ul style="list-style-type: none"> • unshielded, max. 	600 m
Analog inputs	
Number of analog inputs	4
permissible input voltage for voltage input (destruction limit), max.	30 V
permissible input current for current input (destruction limit), max.	40 mA
Input ranges	
<ul style="list-style-type: none"> • Voltage 	Yes
<ul style="list-style-type: none"> • Current 	Yes
<ul style="list-style-type: none"> • Thermocouple 	Yes
<ul style="list-style-type: none"> • Resistance thermometer 	Yes
Input ranges (rated values), voltages	
<ul style="list-style-type: none"> • 0 to +10 V 	Yes
— Input resistance (0 to 10 V)	100 kΩ
<ul style="list-style-type: none"> • -1.75 V to +11.75 V 	Yes
— Input resistance (-1.75 V to +11.75 V)	100 kΩ
<ul style="list-style-type: none"> • -80 mV to +80 mV 	Yes
— Input resistance (-80 mV to +80 mV)	10 MΩ
Input ranges (rated values), currents	
<ul style="list-style-type: none"> • 0 to 20 mA 	Yes
— Input resistance (0 to 20 mA)	50 Ω
<ul style="list-style-type: none"> • 0 to 23.5 mA 	Yes
— Input resistance (0 to 23.5 mA)	50 Ω
<ul style="list-style-type: none"> • -3.5 mA to +23.5 mA 	Yes
— Input resistance (-3.5 mA to +23.5 mA)	50 Ω
<ul style="list-style-type: none"> • 4 mA to 20 mA 	Yes
— Input resistance (4 mA to 20 mA)	50 Ω
Input ranges (rated values), thermocouples	
<ul style="list-style-type: none"> • Type B 	Yes
— Input resistance (Type B)	10 MΩ
<ul style="list-style-type: none"> • Type J 	Yes
— Input resistance (type J)	10 MΩ
<ul style="list-style-type: none"> • Type K 	Yes
— Input resistance (Type K)	10 MΩ
<ul style="list-style-type: none"> • Type R 	Yes
— Input resistance (Type R)	10 MΩ
<ul style="list-style-type: none"> • Type S 	Yes
— Input resistance (Type S)	10 MΩ
Input ranges (rated values), resistance thermometer	
<ul style="list-style-type: none"> • Pt 100 	Yes
— Input resistance (Pt 100)	10 MΩ
Thermocouple (TC)	
Temperature compensation	
— internal temperature compensation	Yes
— external temperature compensation with Pt100	Yes
Characteristic linearization	
<ul style="list-style-type: none"> • parameterizable 	Yes
— for thermocouples	Type B, J, K, R, S

— for resistance thermometer	Pt100 (standard)
Cable length	
• shielded, max.	200 m; 50 m at 80 mV and thermocouples
Analog value generation for the inputs	
Integration and conversion time/resolution per channel	
• Resolution with overrange (bit including sign), max.	14 bit; 12 bit or 14 bit, parameterizable
Encoder	
Connection of signal encoders	
• for voltage measurement	Yes
• for current measurement as 4-wire transducer	Yes
Connectable encoders	
• 2-wire sensor	Yes
— permissible quiescent current (2-wire sensor), max.	1.5 mA
Errors/accuracies	
Operational error limit in overall temperature range	
• Voltage, relative to input range, (+/-)	0.6 %; ± 0.6 to $\pm 1\%$
• Current, relative to input range, (+/-)	0.6 %; ± 0.6 to $\pm 1\%$
• Resistance thermometer, relative to input range, (+/-)	0.6 %; ± 0.6 to $\pm 1\%$
Basic error limit (operational limit at 25 °C)	
• Voltage, relative to input range, (+/-)	0.4 %; 80 mV: ± 0.6 %; 250 to 1 000 mV: ± 0.4 %; 2.5 to 10 V: ± 0.6 %; 3.2 to 20 mA: ± 0.5 %
• Current, relative to input range, (+/-)	0.4 %; ± 0.4 to ± 0.6 %
• Resistance thermometer, relative to input range, (+/-)	0.4 %; ± 0.4 to ± 0.6 %
Interrupts/diagnostics/status information	
Substitute values connectable	Yes; Parameterizable
Integrated Functions	
Counter	No
Control technology	
• Number of closed-loop controllers	4
Potential separation	
Potential separation controller	
• between the channels	No
• between the channels and backplane bus	Yes; Optocoupler
Isolation	
Isolation tested with	500 V DC
connection method	
required front connector	2x 20-pin
Dimensions	
Width	80 mm
Height	125 mm
Depth	120 mm
Weights	
Weight, approx.	470 g
Classifications	

	Version	Classification
eClass	14	27-24-22-05
eClass	12	27-24-22-05
eClass	9.1	27-24-22-05
eClass	9	27-24-22-05
eClass	8	27-24-22-05
eClass	7.1	27-24-22-05
eClass	6	27-24-22-05
ETIM	9	EC001422
ETIM	8	EC001422
ETIM	7	EC001422
IDEA	4	3567
UNSPSC	15	32-15-17-05



other


Environment

[Confirmation](#)

[Environmental Confirmations](#)

last modified:

4/7/2025

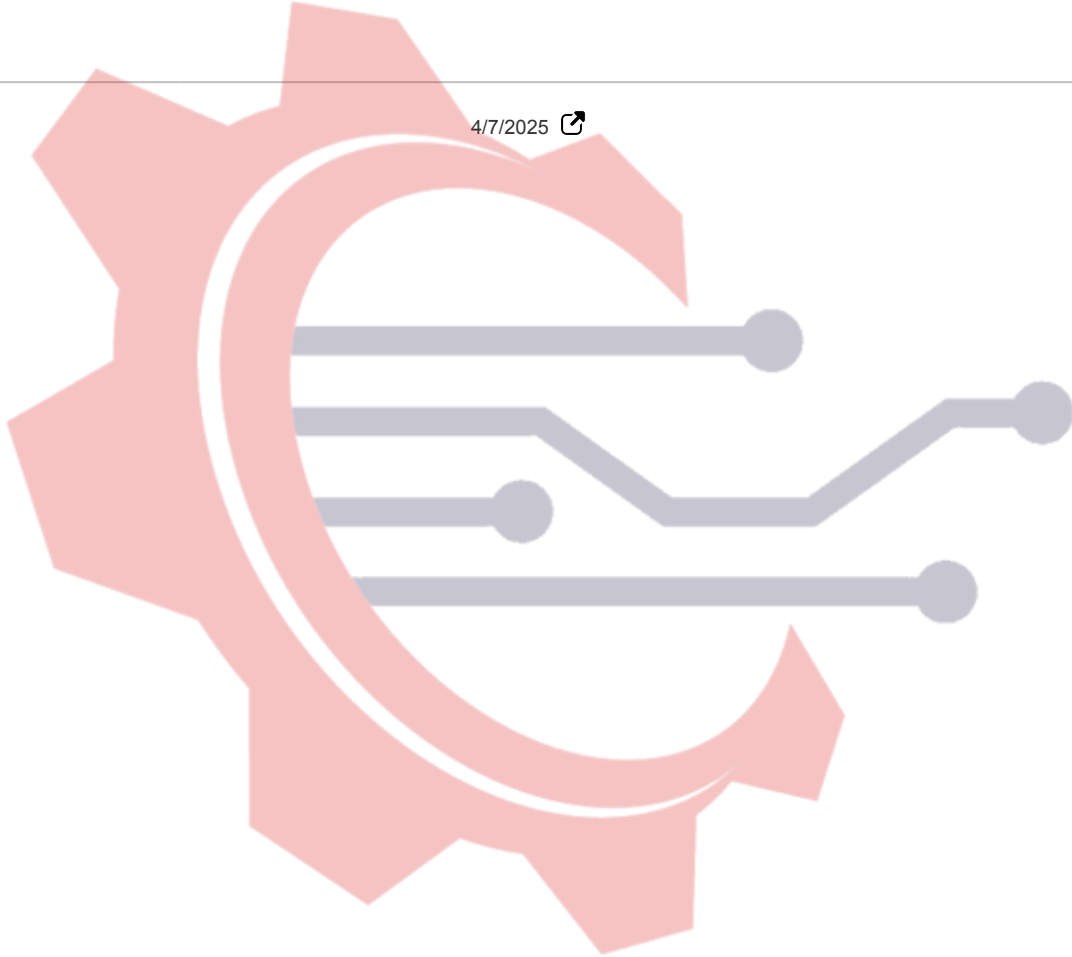

ماکان کنترول