


Siemens
EcoTech



SIMATIC S7-1500, analog input module AI 16xI BA, 16-bit resolution accuracy 0.5%, 16 channels in groups of 16, common mode voltage 4 V DC, diagnostics, hardware interrupts; delivery including infeed element, shield bracket and shield terminal: front connector (screw terminals or push-in) to be ordered separately

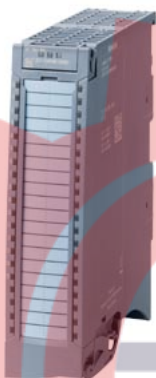

General information

Product type designation	AI 16xI BA
HW functional status	from FS01
Firmware version	V1.0.0
<ul style="list-style-type: none"> FW update possible 	Yes
Product function	
<ul style="list-style-type: none"> I&M data 	Yes; I&M0 to I&M3
<ul style="list-style-type: none"> Isochronous mode 	No
<ul style="list-style-type: none"> Prioritized startup 	No
<ul style="list-style-type: none"> Measuring range scalable 	No
<ul style="list-style-type: none"> Scalable measured values 	No
<ul style="list-style-type: none"> Adjustment of measuring range 	No
Engineering with	
<ul style="list-style-type: none"> STEP 7 TIA Portal configurable/integrated from version 	V16 with HSP 312 / V17
<ul style="list-style-type: none"> STEP 7 configurable/integrated from version 	V5.5 SP3 / -
<ul style="list-style-type: none"> PROFIBUS from GSD version/GSD revision 	V1.0 / V5.1
<ul style="list-style-type: none"> PROFINET from GSD version/GSD revision 	V2.3 / -
Operating mode	
<ul style="list-style-type: none"> Oversampling 	No
<ul style="list-style-type: none"> MSI 	Yes
CiR - Configuration in RUN	
Reparameterization possible in RUN	Yes
Calibration possible in RUN	No
Power	
Power consumption from the backplane bus	0.85 W
Power loss	
Power loss, typ.	1.2 W
Analog inputs	
Number of analog inputs	16
<ul style="list-style-type: none"> For current measurement 	16
permissible input current for current input (destruction limit), max.	40 mA
Input ranges (rated values), currents	
<ul style="list-style-type: none"> 0 to 20 mA 	Yes
<ul style="list-style-type: none"> — Input resistance (0 to 20 mA) 	25 Ω; Plus approx. 42 ohms for overvoltage protection by PTC
<ul style="list-style-type: none"> -20 mA to +20 mA 	Yes
<ul style="list-style-type: none"> — Input resistance (-20 mA to +20 mA) 	25 Ω; Plus approx. 42 ohms for overvoltage protection by PTC

<ul style="list-style-type: none"> • 4 mA to 20 mA — Input resistance (4 mA to 20 mA) 	Yes 25 Ω; Plus approx. 42 ohms for overvoltage protection by PTC
Cable length	
<ul style="list-style-type: none"> • shielded, max. 	800 m
Analog value generation for the inputs	
Measurement principle	integrating
Integration and conversion time/resolution per channel	
<ul style="list-style-type: none"> • Resolution with overrange (bit including sign), max. • Integration time, parameterizable • Integration time (ms) • Basic conversion time, including integration time (ms) • Interference voltage suppression for interference frequency f_1 in Hz 	16 bit Yes 2,5 / 16,67 / 20 / 100 ms 10 / 24 / 27 / 107 ms 400 / 60 / 50 / 10 Hz
Smoothing of measured values	
<ul style="list-style-type: none"> • parameterizable • Step: None • Step: low • Step: Medium • Step: High 	Yes Yes Yes Yes Yes
Encoder	
Connection of signal encoders	
<ul style="list-style-type: none"> • for voltage measurement • for current measurement as 2-wire transducer • for current measurement as 4-wire transducer • for resistance measurement with two-wire connection • for resistance measurement with three-wire connection • for resistance measurement with four-wire connection 	No Yes; with external supply Yes No No No
Errors/accuracies	
Linearity error (relative to input range), (+/-)	0.1 %
Temperature error (relative to input range), (+/-)	0.006 %/K
Crosstalk between the inputs, max.	-50 dB
Repeat accuracy in steady state at 25 °C (relative to input range), (+/-)	0.1 %
Operational error limit in overall temperature range	
<ul style="list-style-type: none"> • Current, relative to input range, (+/-) 	0.5 %
Basic error limit (operational limit at 25 °C)	
<ul style="list-style-type: none"> • Current, relative to input range, (+/-) 	0.3 %
Interference voltage suppression for $f = n \times (f_1 \pm 1 \%)$, $f_1 =$ interference frequency	
<ul style="list-style-type: none"> • Series mode interference (peak value of interference < rated value of input range), min. • Common mode voltage, max. • Common mode interference, min. 	40 dB 4 V 60 dB
Interrupts/diagnostics/status information	
Diagnostics function	Yes
Alarms	
<ul style="list-style-type: none"> • Diagnostic alarm • Limit value alarm 	Yes Yes; two upper and two lower limit values in each case
Diagnoses	
<ul style="list-style-type: none"> • Monitoring the supply voltage • Wire-break • Short-circuit • Group error • Overflow/underflow 	No Yes; Only for 4 ... 20 mA No No Yes
Diagnostics indication LED	
<ul style="list-style-type: none"> • RUN LED • ERROR LED • MAINT LED • Monitoring of the supply voltage (PWR-LED) • Channel status display • for channel diagnostics • for module diagnostics 	Yes; green LED Yes; red LED No No Yes; green LED Yes; red LED Yes; red LED

Potential separation		
Potential separation channels		
• between the channels	No	
• between the channels, in groups of	16	
• between the channels and backplane bus	Yes	
Permissible potential difference		
between the inputs (UCM)	8 V DC	
Between the inputs and MANA (UCM)	4 V DC	
Isolation		
Isolation tested with	707 V DC (type test)	
Standards, approvals, certificates		
Siemens Eco Profile (SEP)	Siemens EcoTech	
Ecological footprint		
• environmental product declaration	Yes	
Global warming potential		
— global warming potential, (total) [CO2 eq]	38.6 kg	
— global warming potential, (during production) [CO2 eq]	14.4 kg	
— global warming potential, (during operation) [CO2 eq]	24.6 kg	
— global warming potential, (after end of life cycle) [CO2 eq]	-0.44 kg	
product functions / security / header		
signed firmware update	No	
data integrity	No	
Ambient conditions		
Ambient temperature during operation		
• horizontal installation, min.	-30 °C	
• horizontal installation, max.	60 °C	
• vertical installation, min.	-30 °C	
• vertical installation, max.	40 °C	
Altitude during operation relating to sea level		
• Installation altitude above sea level, max.	5 000 m; Restrictions for installation altitudes > 2 000 m, see manual	
Dimensions		
Width	35 mm	
Height	147 mm	
Depth	129 mm	
Weights		
Weight, approx.	250 g	
Classifications		
	Version	Classification
eClass	14	27-24-22-01
eClass	12	27-24-22-01
eClass	9.1	27-24-22-01
eClass	9	27-24-22-01
eClass	8	27-24-22-01
eClass	7.1	27-24-22-01
eClass	6	27-24-22-01
ETIM	9	EC001420
ETIM	8	EC001420
ETIM	7	EC001420
IDEA	4	3562
UNSPSC	15	32-15-17-05
Approvals / Certificates		
General Product Approval		



[Miscellaneous](#)



[KC](#)



For use in hazardous locations



[FM](#)

[CCC-Ex](#)



[Type Examination Certificate](#)



For use in hazardous locations

Marine / Shipping

[Miscellaneous](#)



[NK / Nippon Kaiji Kyokai](#)

Marine / Shipping

Environment



[CCS \(China Classification Society\)](#)



Siemens EcoTech



last modified:

5/16/2025

ماکان کنترول