

SIMATIC S7-1500H synchronization module for optical fiber cables from 8 km to 40 km, fiber category OS2, connector type LC

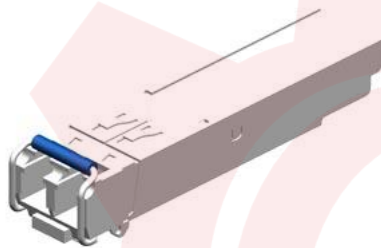


Figure similar

General information	
Product type designation	Synchronization module
Engineering with	<ul style="list-style-type: none"> STEP 7 TIA Portal configurable/integrated from version V18 (FW V3.0)
Power loss	
Power loss, typ.	0.99 W
Interfaces	
Optical interface	Yes
<ul style="list-style-type: none"> design of optical connection 	LC
<ul style="list-style-type: none"> wavelength of optical interface 	1 310 nm
<ul style="list-style-type: none"> range (depending on optical fiber used), min. 	8 km
<ul style="list-style-type: none"> range (depending on optical fiber used), max. 	40 km
Ambient conditions	
Ambient temperature during operation	<ul style="list-style-type: none"> horizontal installation, min. 0 °C horizontal installation, max. 55 °C vertical installation, min. 0 °C vertical installation, max. 35 °C
Ambient temperature during storage/transportation	<ul style="list-style-type: none"> min. -40 °C max. 70 °C
Dimensions	
Width	13 mm
Height	14 mm
Depth	58 mm
Weights	
Weight, approx.	20.4 g
Classifications	

	Version	Classification
eClass	14	27-24-22-08
eClass	12	27-24-22-08
eClass	9.1	27-24-22-08
eClass	9	27-24-22-08
eClass	8	27-24-22-08
eClass	7.1	27-24-22-08
eClass	6	27-24-22-08
ETIM	9	EC001423

ETIM	8	EC001423
ETIM	7	EC001423
IDEA	4	3564
UNSPSC	15	32-15-17-05


Approvals / Certificates

General Product Approval



last modified:

10/7/2024

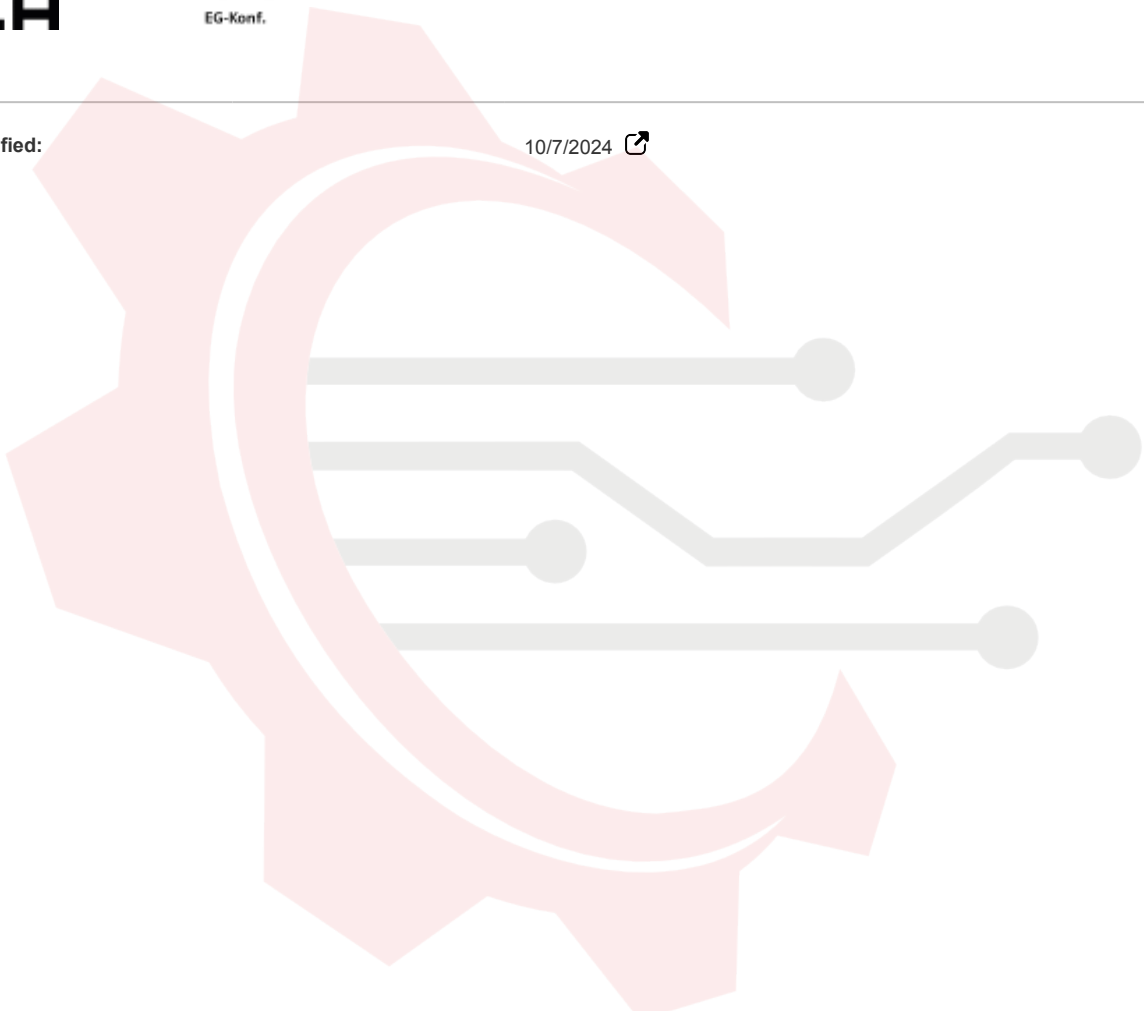

ماکان کنترول