

SIMATIC ET 200SP, BusAdapter BA 2xFC, 2x FastConnect connections



General information		
Product type designation	BA 2xFC	
Interfaces		
Number of PROFINET interfaces	1	
Supports protocol for PROFINET IO		
• Number of FC (FastConnect) connections	2	
Cable length		
— Cu conductors	100 m	
Ambient conditions		
Ambient temperature during operation		
• horizontal installation, min.	-30 °C	
• horizontal installation, max.	60 °C	
• vertical installation, min.	-30 °C	
• vertical installation, max.	50 °C	
Altitude during operation relating to sea level		
• Installation altitude above sea level, max.	5 000 m; restrictions for installation altitudes > 2 000 m, see ET 200SP system manual	
Dimensions		
Width	20 mm	
Height	69.5 mm	
Depth	59 mm	
Weights		
Weight, approx.	53 g	
Classifications		
	Version	Classification
eClass	14	27-24-26-92
eClass	12	27-24-26-92
eClass	9.1	27-24-26-92
eClass	9	27-24-26-92
eClass	8	27-24-26-92
eClass	7.1	27-24-26-92
eClass	6	27-24-26-92
ETIM	10	EC002584
ETIM	9	EC002584
ETIM	8	EC002584
ETIM	7	EC002584
IDEA	4	3552

Approvals / Certificates

General Product Approval


EMV

Environment

[Manufacturer Declaration](#)

last modified:

4/7/2025

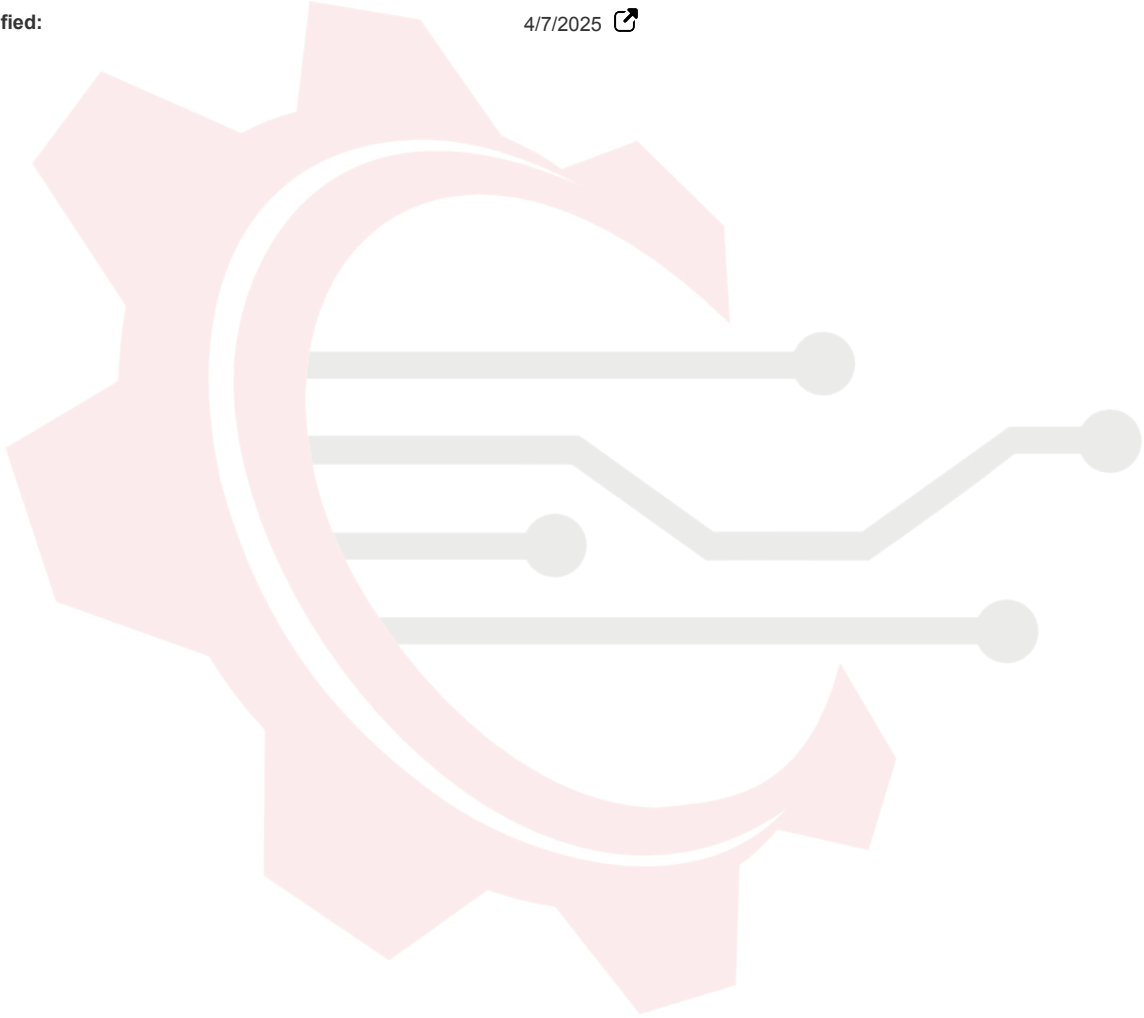

ماکان کنترول