



Figure similar

Article No. : 6SL3210-5BE21-5CV1

Client order no. :
Order no. :
Offer no. :
Remarks :

Item no. :
Consignment no. :
Project :

Rated data

| Input | |
|------------------|---------------------------|
| Number of phases | 3 AC |
| Line voltage | 380 ... 480 V -15 % +10 % |
| Line frequency | 47 ... 63 Hz |

| Output | |
|----------------------|----------------------------------|
| Number of phases | 3 AC |
| Rated voltage | 400V IEC 480V NEC 1) |
| Rated power (LO) | 1.50 kW 2.00 hp |
| Rated power (HO) | 1.50 kW 2.00 hp |
| Rated current (LO) | 4.10 A 4.10 A |
| Rated current (HO) | 4.10 A 4.10 A |
| Rated current (IN) | 4.10 A |
| Pulse frequency | 4.00 kHz |
| Output frequency | 0 ... 550 Hz |

| Overload capability | |
|---------------------|---|
| Low Overload (LO) | 110 % rated output current for 60 s, cycle time 300 s |
| High Overload (HO) | 150 % rated output current for 60 s, cycle time 300 s |

General tech. specifications

| | |
|---------------------------------|---------|
| Power factor λ | 0.72 |
| Offset factor $\cos \varphi$ | 0.95 |
| Efficiency η | 0.98 |
| Filter class (integrated) | Class A |
| With integrated braking chopper | Yes |

Communication

| | |
|---------------|-----------------|
| Communication | USS, Modbus RTU |
|---------------|-----------------|

Inputs / outputs

| Standard digital inputs | |
|-------------------------|---|
| Number | 4 |

| Digital outputs | |
|------------------------------------|---|
| Number as relay changeover contact | 1 |
| Number as transistor | 1 |

| Analog inputs | |
|---------------|---|
| Number | 2 (Can be used as additional digital input) |

| Analog outputs | |
|----------------|---|
| Number | 1 |

Ambient conditions

| | |
|-----------------------|-----------------------|
| Cooling | External fan |
| Installation altitude | 1,000 m (3,280.84 ft) |

| Ambient temperature | |
|-------------------------|--------------------------------|
| Operation ²⁾ | -10 ... 60 °C (14 ... 140 °F) |
| Storage | -40 ... 70 °C (-40 ... 158 °F) |

| Relative humidity | |
|-------------------|------|
| Max. operation | 95 % |

Connections

| Max. motor cable length | |
|-------------------------|------------------|
| Shielded | 10 m (32.81 ft) |
| Unshielded | 50 m (164.04 ft) |

Mechanical data

| Mounting position | Wall mounting / side-by-side mounting |
|----------------------|---------------------------------------|
| Degree of protection | IP20 / UL open type |
| Frame size | FSA |
| Net weight | 1.10 kg (2.43 lb) |
| Dimensions | |
| Width | 90.0 mm (3.54 in) |
| Height | 166.0 mm (6.54 in) |
| Depth | 145.5 mm (5.73 in) |

Standards


| | |
|---------------------------|--|
| Compliance with standards | CE, cULus, C-Tick (RCM), KC |
| CE marking | EN 61800-5-1 / EN 60204-1 and EN 61800-3 |

Data sheet for SINAMICS V20

Article No. : 6SL3210-5BE21-5CV1

Converter losses to IEC61800-9-2*

| | |
|--|--------|
| Efficiency class | IE2 |
| Comparison with the reference converter (90% / 100%) | 28.4 % |

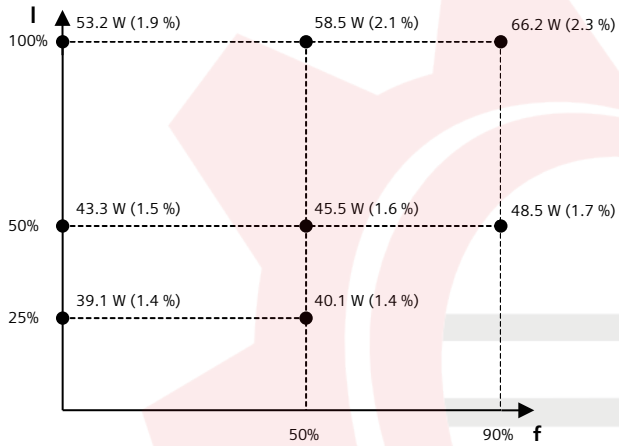

The percentage values show the losses in relation to the rated apparent power of the converter.

The diagram shows the losses for the points (as per standard IEC61800-9-2) of the relative torque generating current (I) over the relative motor stator frequency (f). The values are valid for the basic version of the converter without options/components.

*calculated values

¹⁾The output current and HP ratings are valid for the voltage range 440V-480V

²⁾Please observe derating at temperatures of 40 °C or above