



SIMATIC S7-300, Analog output SM 332, isolated, 2 AO, U/I; resolution 11/12 bits, 20-pole, Removing/inserting with active backplane bus possible

Figure similar

| Supply voltage | |
|--|---|
| Load voltage L+ | |
| <ul style="list-style-type: none"> Rated value (DC) | 24 V |
| <ul style="list-style-type: none"> Reverse polarity protection | Yes |
| Input current | |
| from load voltage L+ (without load), max. | 135 mA |
| from backplane bus 5 V DC, max. | 60 mA |
| Power loss | |
| Power loss, typ. | 3 W |
| Analog outputs | |
| Number of analog outputs | 2 |
| Voltage output, short-circuit protection | Yes |
| Voltage output, short-circuit current, max. | 25 mA |
| Current output, no-load voltage, max. | 18 V |
| Output ranges, voltage | |
| <ul style="list-style-type: none"> 0 to 10 V | Yes |
| <ul style="list-style-type: none"> 1 V to 5 V | Yes |
| <ul style="list-style-type: none"> -10 V to +10 V | Yes |
| Output ranges, current | |
| <ul style="list-style-type: none"> 0 to 20 mA | Yes |
| <ul style="list-style-type: none"> -20 mA to +20 mA | Yes |
| <ul style="list-style-type: none"> 4 mA to 20 mA | Yes |
| Load impedance (in rated range of output) | |
| <ul style="list-style-type: none"> with voltage outputs, min. | 1 k Ω |
| <ul style="list-style-type: none"> with voltage outputs, capacitive load, max. | 1 μ F |
| <ul style="list-style-type: none"> with current outputs, max. | 500 Ω |
| <ul style="list-style-type: none"> with current outputs, inductive load, max. | 10 mH |
| Cable length | |
| <ul style="list-style-type: none"> shielded, max. | 200 m |
| Analog value generation for the outputs | |
| Integration and conversion time/resolution per channel | |
| <ul style="list-style-type: none"> Resolution with overrange (bit including sign), max. | 12 bit; ± 10 V, ± 20 mA, 4 mA to 20 mA, 1 V to 5 V: 11 bit + sign; 0 V to 10 V, 0 mA to 20 mA: 12 bit |
| <ul style="list-style-type: none"> Conversion time (per channel) | 0.8 ms |
| Settling time | |
| <ul style="list-style-type: none"> for resistive load | 0.2 ms |
| <ul style="list-style-type: none"> for capacitive load | 3.3 ms |
| <ul style="list-style-type: none"> for inductive load | 0.5 ms; 0.5 ms (1 mH); 3.3 ms (10 mH) |
| Errors/accuracies | |

| | |
|--|----------------------|
| Operational error limit in overall temperature range | |
| • Voltage, relative to output range, (+/-) | 0.5 % |
| • Current, relative to output range, (+/-) | 0.6 % |
| Basic error limit (operational limit at 25 °C) | |
| • Voltage, relative to output range, (+/-) | 0.4 % |
| • Current, relative to output range, (+/-) | 0.5 % |
| Interrupts/diagnostics/status information | |
| Diagnostics function | Yes; Parameterizable |
| Alarms | |
| • Diagnostic alarm | Yes; Parameterizable |
| Diagnoses | |
| • Diagnostic information readable | Yes |
| Diagnostics indication LED | |
| • Group error SF (red) | Yes |
| Potential separation | |
| Potential separation analog outputs | |
| • between the channels | No |
| • between the channels and backplane bus | Yes |
| • Between the channels and load voltage L+ | Yes |
| • between the channels and the power supply of the electronics | Yes |
| Isolation | |
| Isolation tested with | 500 V DC |
| connection method | |
| required front connector | 20-pin |
| Dimensions | |
| Width | 40 mm |
| Height | 125 mm |
| Depth | 117 mm |
| Weights | |
| Weight, approx. | 220 g |

| | Version | Classification |
|--------|---------|----------------|
| eClass | 14 | 27-24-22-01 |
| eClass | 12 | 27-24-22-01 |
| eClass | 9.1 | 27-24-22-01 |
| eClass | 9 | 27-24-22-01 |
| eClass | 8 | 27-24-22-01 |
| eClass | 7.1 | 27-24-22-01 |
| eClass | 6 | 27-24-22-01 |
| ETIM | 9 | EC001420 |
| ETIM | 8 | EC001420 |
| ETIM | 7 | EC001420 |
| IDEA | 4 | 3562 |
| UNSPSC | 15 | 32-15-17-05 |

| | |
|---------------------------------|-----|
| Approvals / Certificates | |
| General Product Approval | EMV |



[KC](#)

| | | | |
|-------------------|-------|-------------|--------------------------|
| Marine / Shipping | other | Environment | Industrial Communication |
|-------------------|-------|-------------|--------------------------|




[Confirmation](#)

[Environmental Con-
firmations](#)



last modified:

4/7/2025

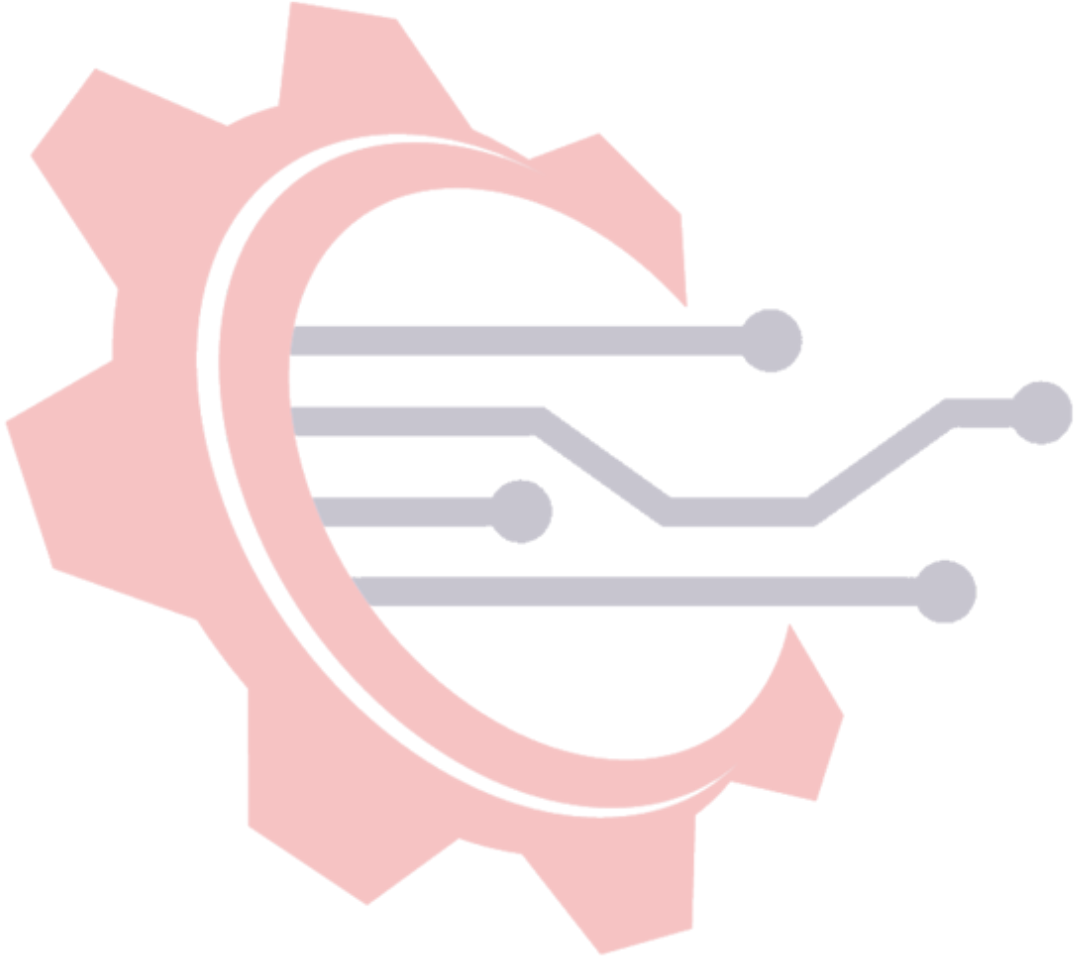

ماكان كنترول